



UNDERWATER LIGHTING

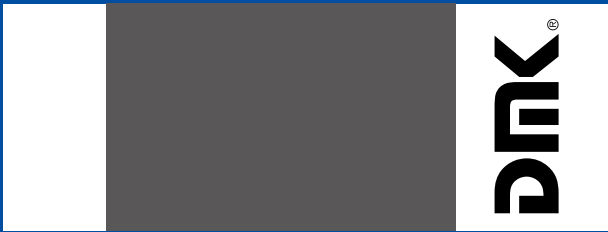

# UWR 45 水下灯

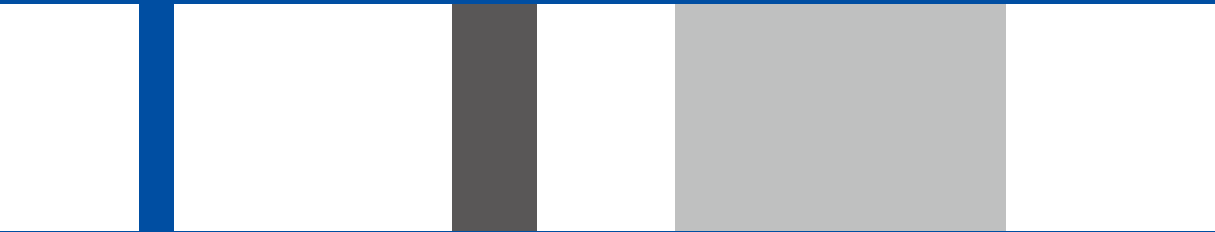

24V DC	IP 68	Class III	Ra>80	CE	RoHS	Ik 03
PWM	1-10 V	Dali	2000 K	3000 K	6000 K	

## UWR 45


High quality underwater luminaire, it is suitable for swimming pools, water attractions, fountains etc; Temperature of water between -20°C~40°C less than 1 meter depth;

- Housing is made of molding shaped hard chromeplated stainless steel SUS 316 L# ;
- 7 mm step tempered glass enclosure;
- Silicone gasket;
- IP 68 PG-11 copper with nickel-coated;
- Power cable Ho7RN-F 2x1.0 mm<sup>2</sup> L = 3.0 m;
- Mounting sleeve ABS;
- Options: PWM / 1-10 V / Dali;
- 2000 k / 3000 k / 6000 k;
- beam angle;

## UWR 45 水下灯

高品质水下照明灯具，适用于游泳池、水景，喷泉等水体照明；产品适用不大于 1 米水深、-20°C~40°C 的水温环境；

- 316 L 不锈钢灯体，表面镀铬处理；
- 7 mm 厚钢化玻璃灯罩；
- 三元乙丙橡胶密封胶圈；
- IP 68 PG-11 电缆锁头，预留 2x1.0 mm<sup>2</sup> 电缆，长度 3 米；
- ABS预埋件；
- 可选项包括: PWM / 1-10 V / Dali ;
- 2000 k / 3000 k / 6000 k ;
- 光束角。

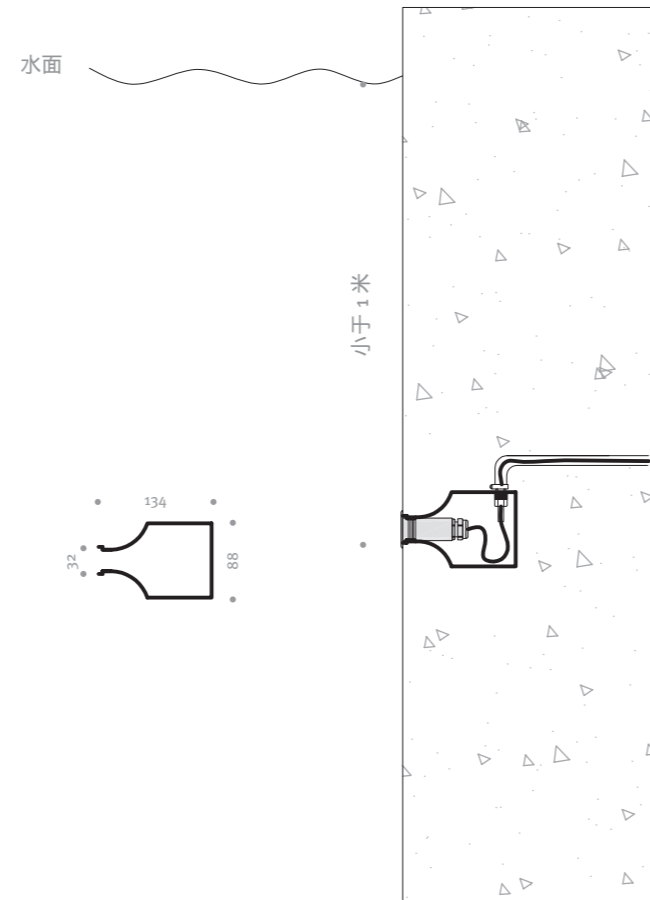

## UWR 45 Guide UWR 45 订货指南

Article No. 产品编号	Product Name 产品名称	Description 描述	Optics 光学系统	LED Lamps LED 光源
				2 W
9 871 04 01	UWR 45	DC12 V / 24 V 1x2 W 单色 leds, 10° 光束角 IP 68 IK 03	LS-10	
9 871 04 02		DC12 V / 24 V 1x2 W 单色 leds, 15° 光束角 IP 68 IK 03	LS-15	
9 871 04 03		DC12 V / 24 V 1x2 W 单色 leds, 20° 光束角 IP 68 IK 03	LS-20	
9 871 04 04		DC12 V / 24 V 1x2 W 单色 leds, 30° 光束角 IP 68 IK 03	LS-30	
1 871 04 01	Installation sleeve	ABS预埋件, 尺寸 Φ 32mm × 134mm		

Order No.: Article No. + Lamp (Colour Temperature) , Driver and controllers need to be purchased separately  
 订货方式: 产品编号+光源 (色温) , 驱动电源、控制器等需要另外选购



# UWR 68 水下灯



24V DC	IP 68	Class III	Ra>80	CE	RoHS	Ik 06
PWM	1-10 V	Dali	2000 K	3000 K	6000 K	RGB



## UWR 68



High quality underwater luminaire, it is suitable for swimming pools, water attractions, fountains etc;  
 Temperature of water between -20°C ~ 40°C less than 1 meter depth;  
 Built-in overheat sensor system, Automatic Shutdown at 75°C;

Housing is made of molding shaped hard chromeplated stainless steel SUS 316 L# ;  
 7 mm step tempered glass enclosure;  
 Silicone gasket;  
 IP68 PG-11 copper with nickel-coated;  
 Power cable Ho7RN-F 2 x 1.0 mm<sup>2</sup> ( RGB 4x0.75 mm<sup>2</sup> / RGBW 5x0.5 mm<sup>2</sup> ), L = 3.0 m;  
 Mounting sleeve ABS;  
 Options: PWM / 1-10 V / Dali;  
 2000 k / 3000 k / 6000 k / RGB / RGBW;  
 beam angle.

## UWR 68 水下灯

高品质水下照明灯具，适用于游泳池、水景，喷泉等水体照明；  
 产品适用不大于 1 米水深、-20°C ~ 40°C 的水温环境；  
 产品具有 75°C 过温保护功能；

316 L 不锈钢灯体，表面镀铬处理；  
 7 mm 厚钢化玻璃灯罩；  
 硅胶密封圈；  
 IP68 PG-11 电缆锁头，预留 2x1.0 mm<sup>2</sup> ( RGB 4x0.75 mm<sup>2</sup> / RGBW 5x0.5 mm<sup>2</sup> ) 电缆，长度 3 米；  
 ABS 预埋件；  
 可选项包括：PWM / 1-10 V / Dali;  
 2000 k / 3000 k / 6000 k / RGB / RGBW;  
 光束角。

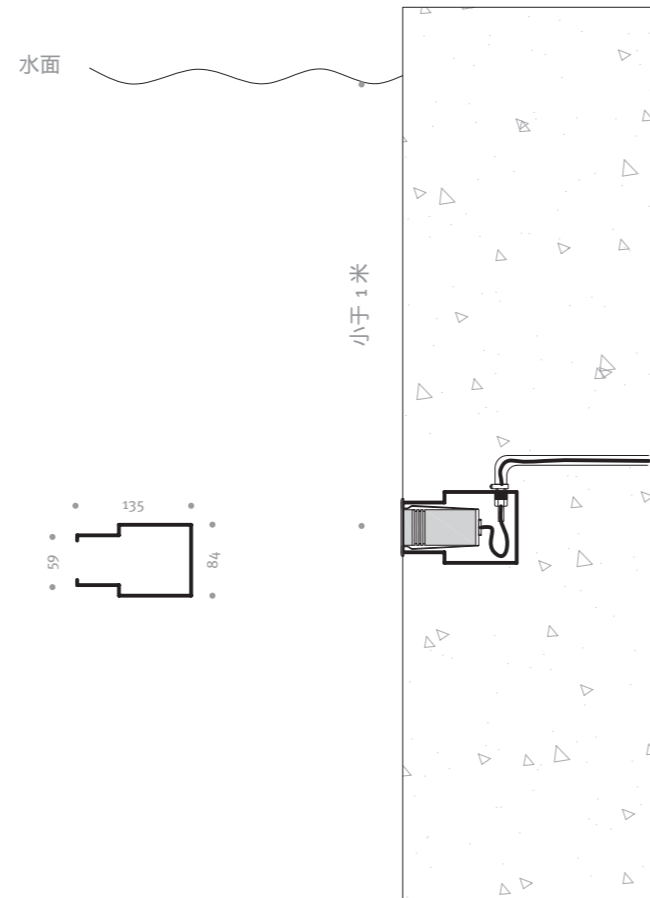

## UWR 68 Guide UWR 68 订货指南

Article No. 产品编号	Product Name 产品名称	Description 描述	Optics 光学系统	LED Lamps LED 光源		
				2.6 W	3 W	4.1 W
9 851 04 01		DC 12 V / 24 V 1x3W 单色 leds 9° 光束角 IP 68 IK06	LS-9	-	-	-
9 851 04 02		DC 12 V / 24 V 1x3W 单色 leds 15° 光束角 IP 68 IK06	LS-15	-	-	-
9 851 04 03		DC 12 V / 24 V 1x3W 单色 leds 20° 光束角 IP 68 IK06	LS-20	-	-	-
9 851 04 04		DC 12 V / 24 V 1x3W 单色 leds 30° 光束角 IP 68 IK06	LS-30	-	-	-
9 851 04 05		DC 12 V / 24 V 1x3W 单色 leds 45° 光束角 IP 68 IK06	LS-45	-	-	-
9 851 04 06	<b>UWR 68</b>	DC 12 V / 24 V 1x3W 单色 leds 60° 光束角 IP 68 IK06	LS-60	-	-	-
9 852 04 01		DC 12 V / 24 V 1x3 W RGB 三合一 leds 20° 光束角 IP 68 IK 06	LS-20	-	-	-
9 852 04 02		DC 12 V / 24 V 1x3 W RGB 三合一 leds 30° 光束角 IP 68 IK 06	LS-30	-	-	-
9 853 04 01		DC 12 V / 24 V 1x3 W RGBW 四合一 leds 20° 光束角 IP 68 IK 06	LS-20	-	-	-
9 853 04 02		DC 12 V / 24 V 1x3 W RGBW 四合一 leds 30° 光束角 IP 68 IK 06	LS-30	-	-	-
9 851 04 11		DC 12 V / 24 V 1x3 W 单色 leds 35 / 45° 光束角 IP 68 IK 06	LA-35 / 45	-	-	-
1 851 04 01	<b>Installation sleeve</b>	ABS预埋件，尺寸 Φ 59mm × 135mm				

Order No.: Article No. + Lamp (Colour Temperature), Driver and controllers need to be purchased separately  
 订货方式: 产品编号+光源 (色温), 驱动电源、控制器等需要另外选购



# UWR 98 水下灯





24V DC	IP 68	Class III	Ra>80	CE	RoHS	Ik 07
PWM	1-10 V	Dali	2000 K	3000 K	6000 K	RGB

**UWR 98**  
 High quality underwater luminaire, it is suitable for swimming pools, water attractions, fountains etc;  
 Temperature of water between -20°C~40°C less than 1 meter depth;  
 Built-in overheat sensor system, Automatic Shutdown at 75°C;

Housing is made of molding shaped hard chromeplated stainless steel SUS 316 L # ;  
 7 mm step tempered glass enclosure;  
 EPDM gasket;  
 IP 68 PG-11 copper with nickel-coated;  
 Power cable Ho7RN-F 2x1.0mm<sup>2</sup> ( RGB 4x0.75 mm<sup>2</sup> ) L=3.0 m;  
 Mounting sleeve ABS;  
 Options: PWM / 1-10 V / Dali;  
 2000 k / 3000 k / 6000 k / RGB;  
 Beam angle;

**UWR 98 水下灯**  
 高品质水下照明灯具，适用于游泳池、水景，喷泉等水体照明；  
 产品适用不大于1米水深、-20°C~40°C的水温环境；  
 产品具有 75°C 过温保护功能；

316 L 不锈钢灯体，表面镀铬处理；  
 7 mm 厚钢化玻璃灯罩；  
 三元乙丙橡胶密封圈；  
 IP 68 PG-11 电缆锁头，预留 2x1.0mm<sup>2</sup> ( RGB 4x0.75 mm<sup>2</sup>;) 电缆，长度3米；  
 ABS预埋件；  
 可选项包括: PWM / 1-10 V / Dali;  
 2000 k / 3000 k / 6000 k / RGB;  
 光束角；

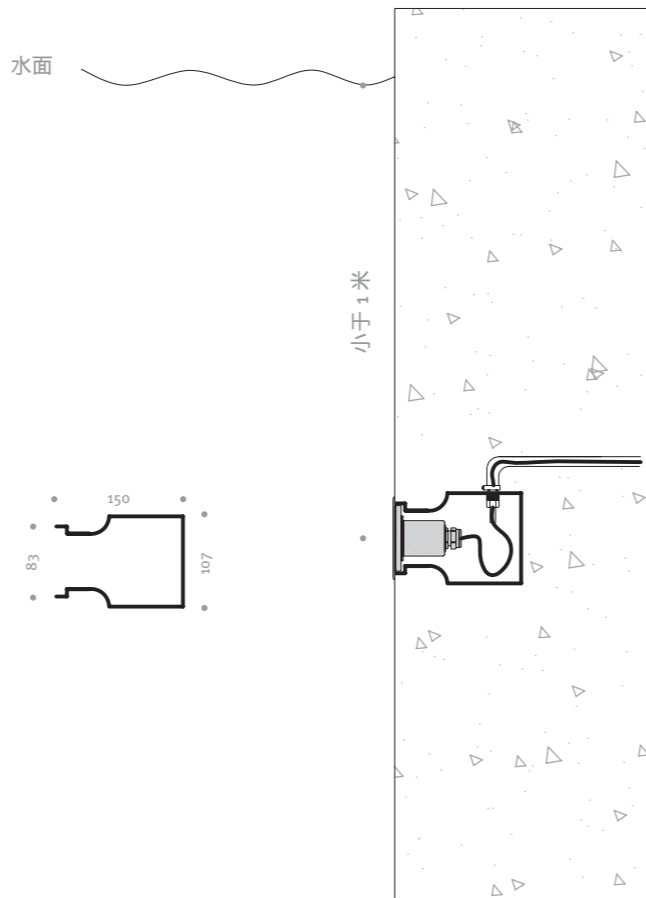

## UWR 98 Guide UWR 98 订货指南

Article No. 产品编号	Product Name 产品名称	Description 描述	Optics 光学系统	LED Lamps LED 光源
				5.6 W    5.9 W
9 861 04 01		DC 12 V / 24 V 3x2 W 单色 leds 15° 光束角 IP 68 IK 07	LS-15	—
9 861 04 02		DC 12 V / 24 V 3x2 W 单色 leds 30° 光束角 IP 68 IK 07	LS-30	—
9 862 04 01	UWR 98	DC 12 V / 24 V 1x4.5 W RGB 三合一 leds 15° 光束角 IP 68 IK 07	LS-15	—
9 862 04 02		DC 12 V / 24 V 1x4.5 W RGB 三合一 leds 22° 光束角 IP 68 IK 07	LS-22	—
9 862 04 03		DC 12 V / 24 V 1x4.5 W RGB 三合一 leds 30° 光束角 IP 68 IK 07	LS-30	—
1 861 04 01	Installation sleeve	ABS预埋件, 尺寸 Φ 83mm × 150mm		

Order No.: Article No. + Lamp (Colour Temperature) , Driver and controllers need to be purchased separately  
 订货方式: 产品编号+光源(色温), 驱动电源、控制器等需要另外选购



# UWR 135 水下灯



24V DC	IP 68	Class III	Ra>80	CE	RoHS	Ik 08
PWM	1-10 V	Dali	2000 K	3000 K	6000 K	RGB





**UWR 135**  
 High quality underwater luminaire, it is suitable for swimming pools, water attractions, fountains etc;  
 Temperature of water between -20°C~40°C less than 1 meter depth;  
 Built-in overheat sensor system, Automatic Shutdown at 75°C;

Housing is made of molding shaped hard chromeplated stainless steel SUS 316 L# ;  
 8 mm step tempered glass enclosure;  
 Silicone gasket;  
 IP 68 PG-11 copper with nickel-coated;  
 Power cable Ho7RN-F 2x1.0mm<sup>2</sup> (RGB 4x1.0 mm<sup>2</sup> / RGBW 5x0.75 mm<sup>2</sup>), L = 3.0 m;  
 Mounting sleeve ABS;  
 Options: PWM / 1-10 V / Dali;  
 2000 k / 3000 k / 6000 k / RGB / RGBW;  
 beam angle;

**UWR 135 水下灯**  
 高品质水下照明灯具，适用于游泳池、水景，喷泉等水体照明；  
 产品适用不大于1米水深、-20°C~40°C的水温环境；  
 产品具有 75°C 过温保护功能；


316 L 不锈钢灯体，表面镀铬处理；  
 8 mm 厚钢化玻璃灯罩；  
 硅胶密封圈；  
 IP 68 PG-11 电缆锁头，预留 2x1.0mm<sup>2</sup> (RGB 4x1.0 mm<sup>2</sup> / RGBW 5x0.75 mm<sup>2</sup>) 电缆，长度3米；  
 ABS 预埋件；  
 可选项包括: PWM / 1-10 V / Dali ;  
 2000 k / 3000 k / 6000 k / RGB / RGBW ;  
 光束角；

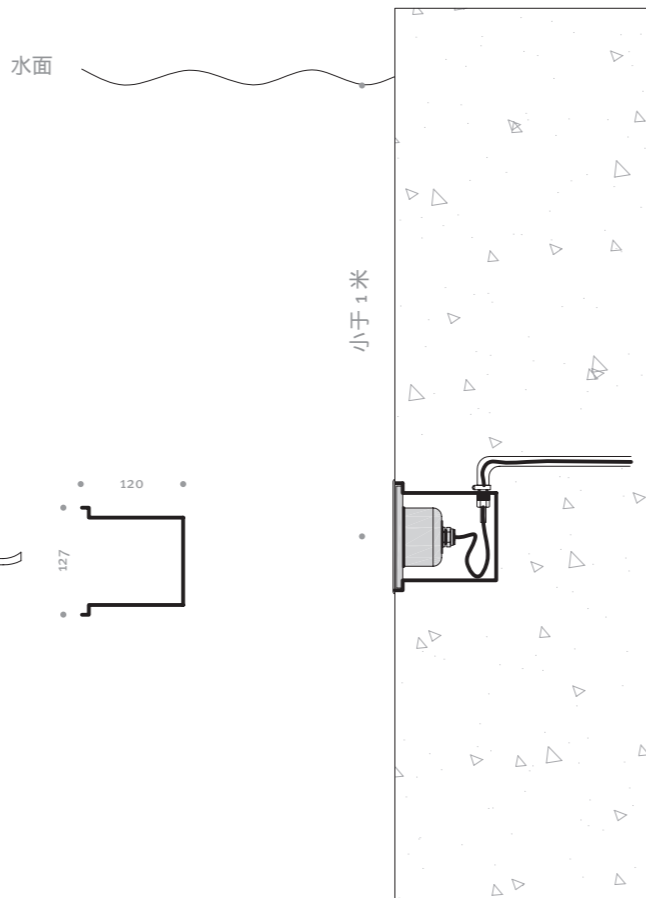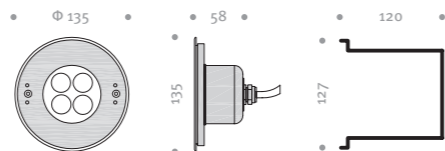

## UWR 135 Guide UWR 135 订货指南

Article No. 产品编号	Product Name 产品名称	Description 描述	Optics 光学系统	LED Lamps LED 光源
				8.9 W 15 W
9 841 04 01		DC 12 V / 24 V 4x2 W 单色 leds 20° 光束角 IP 68 IK 08	LS-20	-
9 841 04 02		DC 12 V / 24 V 4x2 W 单色 leds 25° 光束角 IP 68 IK 08	LS-25	-
9 841 04 03		DC 12 V / 24 V 4x2 W 单色 leds 30° 光束角 IP 68 IK 08	LS-30	-
9 841 04 04	UWR 135	DC 12 V / 24 V 4x2 W 单色 leds 35° 光束角 IP 68 IK 08	LS-35	-
9 841 04 05		DC 12 V / 24 V 4x2 W 单色 leds 45° 光束角 IP 68 IK 08	LS-45	-
9 842 04 01		DC 12 V / 24 V 4x2 W RGB 三合一 leds 30° 光束角 IP 68 IK 08	LS-30	-
9 843 04 01		DC 12 V / 24 V 4x3 W RGBW 四合一 leds 30° 光束角 IP 68 IK 08	LS-30	-
9 841 04 11		DC 12 V / 24 V 4x2 W 单色 leds 35 / 45° 光束角 IP 68 IK 08	LA-35 / 45	-
1 841 04 01	Installation sleeve	ABS预埋件，尺寸 Φ 127 mm × 120 mm		

Order No.: Article No. + Lamp (Colour Temperature), Driver and controllers need to be purchased separately  
 订货方式: 产品编号+光源(色温), 驱动电源、控制器等需要另外选购

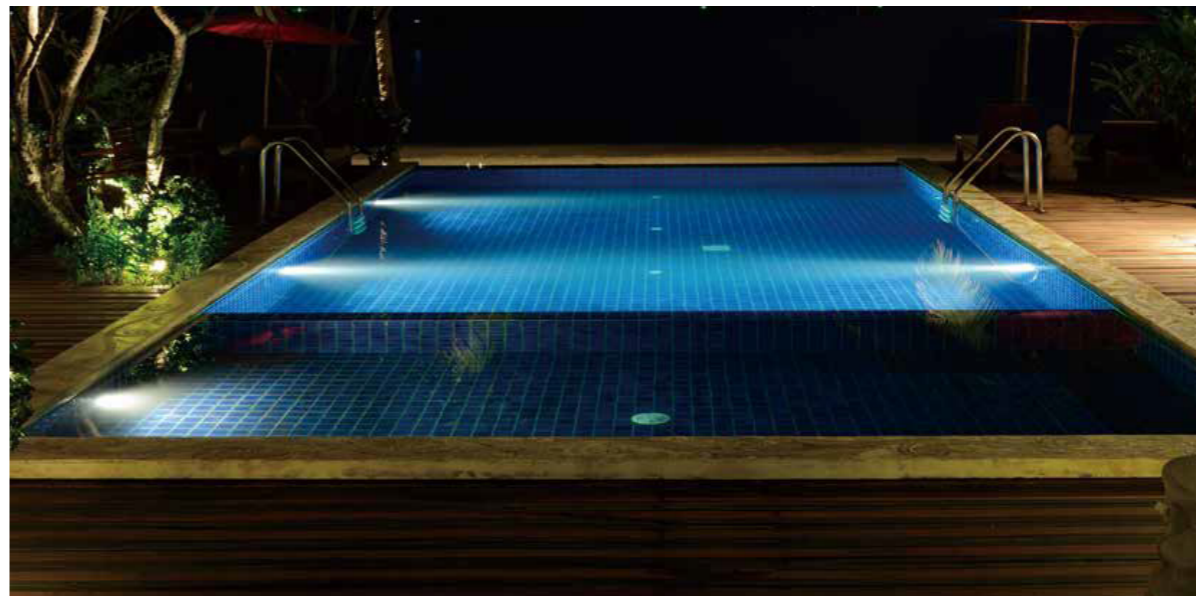

# UWR 180 水下灯



24V DC	IP 68	Class III	Ra>80	CE	RoHS	Ik 08
PWM	1-10 V	Dali	2000 K	3000 K	6000 K	RGB





**UWR 180**  
 High quality underwater luminaire, it is suitable for swimming pools, water attractions, fountains etc;  
 Temperature of water between -20°C~40°C less than 1 meter depth;  
 Built-in overheat sensor system, Automatic Shutdown at 75°C;

Housing is made of molding shaped hard chromeplated stainless steel SUS 316 L# ;  
 8 mm step tempered glass enclosure;  
 Silicone gasket;  
 IP 68 PG-11 copper with nickel-coated;  
 Power cable Ho7RN-F 2x1.0 mm<sup>2</sup> ( RGB 4x1.0 mm<sup>2</sup> / RGBW 5x0.75 mm<sup>2</sup>), L = 3.0 m;  
 Mounting sleeve ABS;  
 Options: PWM / 1-10 V / Dali;  
 2000 k / 3000 k / 6000 k / RGB / RGBW;  
 beam angle;

**UWR 180 水下灯**  
 高品质水下照明灯具，适用于游泳池、水景，喷泉等水体照明；  
 产品适用不大于1米水深、-20°C~40°C的水温环境；  
 产品具有 75°C 过温保护功能；

316 L 不锈钢灯体，表面镀铬处理；  
 8 mm 厚钢化玻璃灯罩；  
 硅胶密封圈；  
 IP 68 PG-11 电缆锁头，预留 2x1.0 mm<sup>2</sup> ( RGB 4x1.0 mm<sup>2</sup> / RGBW 5x0.75 mm<sup>2</sup>) 电缆，长度3米；  
 ABS 预埋件；  
 可选项包括: PWM / 1-10 V / Dali ;  
 2000 k / 3000 k / 6000 k / RGB / RGBW ;  
 光束角；

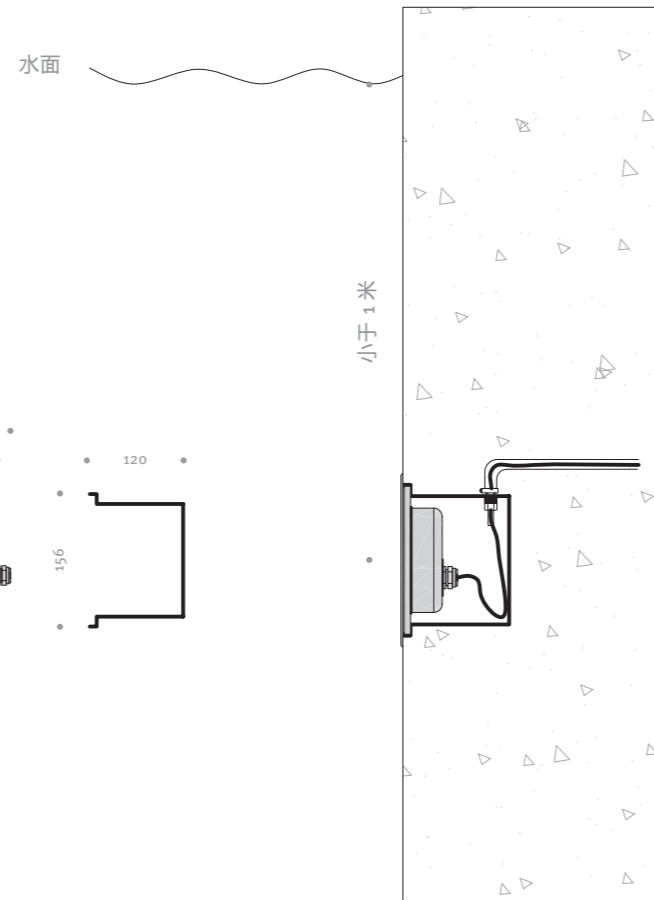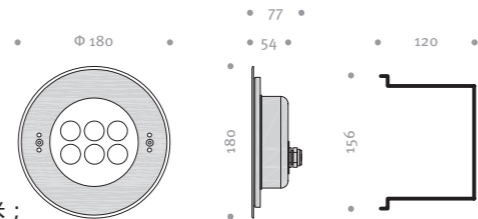

## UWR 180 Guide UWR 180 订货指南

Article No. 产品编号	Product Name 产品名称	Description 描述	Optics 光学系统	LED Lamps LED 光源
				8.9 W 15 W
9 831 04 01		DC 12 V / 24 V 6x2 W 单色 leds 20° 光束角 IP 68 IK 08	LS-20	-
9 831 04 02		DC 12 V / 24 V 6x2 W 单色 leds 25° 光束角 IP 68 IK 08	LS-25	-
9 831 04 03		DC 12 V / 24 V 6x2 W 单色 leds 30° 光束角 IP 68 IK 08	LS-30	-
9 831 04 04	UWR 180	DC 12 V / 24 V 6x2 W 单色 leds 35° 光束角 IP 68 IK 08	LS-35	-
9 831 04 05		DC 12 V / 24 V 6x2 W 单色 leds 45° 光束角 IP 68 IK 08	LS-45	-
9 832 04 01		DC 12 V / 24 V 6x3 W RGB 三合一 leds 30° 光束角 IP 68 IK 08	LS-30	-
9 833 04 01		DC 12 V / 24 V 6x3 W RGBW 四合一 leds 30° 光束角 IP 68 IK 08	LS-30	-
9 831 04 11		DC 12 V / 24 V 6x2 W 单色 leds 35 / 45° 光束角 IP 68 IK 08	LA-35 / 45	-
1 831 04 01	Installation sleeve	ABS预埋件，尺寸 Φ 156 mm × 120 mm		

Order No.: Article No. + Lamp (Colour Temperature), Driver and controllers need to be purchased separately  
 订货方式: 产品编号+光源(色温), 驱动电源、控制器等需要另外选购



# UWR 200 水下灯





24V DC	IP 68	Class III	Ra>80	CE	RoHS	Ik 08
PWM	1-10 V	Dali	2000 K	3000 K	6000 K	RGB

**UWR 200**  
 High quality underwater luminaire, it is suitable for swimming pools, water attractions, fountains etc ;  
 Temperature of water between -20°C~40°C less than 1 meter depth ;  
 Built-in overheat sensor system, Automatic Shutdown at 75°C ;

Housing is made of molding shaped hard chromeplated stainless steel SUS 316 L# ;  
 10 mm step tempered glass enclosure;  
 Silicone gasket;  
 IP 68 PG-11 copper with nickel-coated;  
 Power cable Ho7RN-F 2x1.0 mm<sup>2</sup> ( RGB 4x1.0 mm<sup>2</sup> / RGBW 5x0.75 mm<sup>2</sup> ), L = 3.0 m;  
 Mounting sleeve ABS;  
 Options: PWM / 1-10 V / Dali;  
 2000 k / 3000 k / 6000 k / RGB / RGBW;  
 beam angle;

**UWR 200 水下灯**  
 高品质水下照明灯具，适用于游泳池、水景，喷泉等水体照明；  
 产品适用不大于 1 米水深、-20°C~40°C 的水温环境；  
 产品具有 75°C 过温保护功能；

316 L 不锈钢灯体，表面镀铬处理；  
 10 mm 厚钢化玻璃灯罩；  
 硅胶密封圈；  
 IP 68 PG-11 电缆锁头，预留 2x1.0 mm<sup>2</sup> ( RGB 4x1.0 mm<sup>2</sup> / RGBW 5x0.75 mm<sup>2</sup> ) 电缆，长度 3 米；  
 ABS 预埋件；  
 可选项包括: PWM / 1-10 V / Dali;  
 2000 k / 3000 k / 6000 k / RGB / RGBW;  
 光束角；

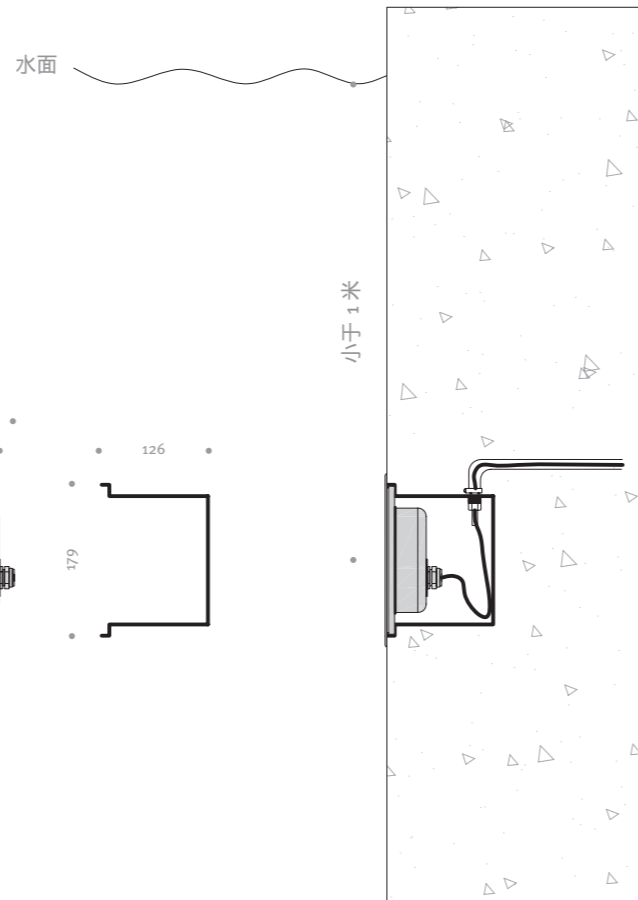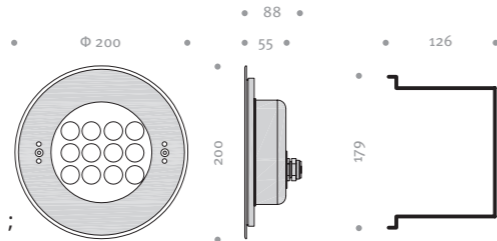

## UWR 200 Guide UWR 200 订货指南

Article No. 产品编号	Product Name 产品名称	Description 描述	Optics 光学系统	LED Lamps LED 光源		
				28.8 W	33.6 W	34.2 W
9 821 04 01	UWR 200	DC 12 V / 24 V 12x2 W 单色 leds 20° 光束角 IP 68 IK 08	LS-20	-	-	-
9 821 04 02		DC 12 V / 24 V 12x2 W 单色 leds 25° 光束角 IP 68 IK 08	LS-25	-	-	-
9 821 04 03		DC 12 V / 24 V 12x2 W 单色 leds 30° 光束角 IP 68 IK 08	LS-30	-	-	-
9 821 04 04		DC 12 V / 24 V 12x2 W 单色 leds 35° 光束角 IP 68 IK 08	LS-35	-	-	-
9 821 04 05		DC 12 V / 24 V 12x2 W 单色 leds 45° 光束角 IP 68 IK 08	LS-45	-	-	-
9 822 04 01		DC 12 V / 24 V 12x2 W RGB 三合一 leds 30° 光束角 IP 68 IK 08	LS-30	-	-	-
9 823 04 01		DC 12 V / 24 V 12x3 W RGBW 四合一 leds 30° 光束角 IP 68 IK 08	LS-30	-	-	-
9 821 04 11		DC 12 V / 24 V 12x2 W 单色 leds 35 / 45° 光束角 IP 68 IK 08	LA-35 / 45	-	-	-
1 821 04 01	Installation sleeve	ABS预埋件，尺寸 Φ 179 mm × 126 mm				

Order No.: Article No. + Lamp (Colour Temperature), Driver and controllers need to be purchased separately  
 订货方式: 产品编号+光源(色温), 驱动电源、控制器等需要另外选购



# UWR 250 水下灯



24V DC	IP 68	Class III	Ra>80	CE	RoHS	Ik 10
PWM	1-10 V	Dali	2000 K	3000 K	6000 K	RGB





**UWR 250**  
 High quality underwater luminaire, it is suitable for swimming pools, water attractions, fountains etc;  
 Temperature of water between -20°C~40°C less than 1 meter depth;  
 Built-in overheat sensor system, Automatic Shutdown at 75°C;

Housing is made of molding shaped hard chromeplated stainless steel SUS 316 L# ;  
 10 mm step tempered glass enclosure;  
 Silicone gasket;  
 IP 68 PG-11 copper with nickel-coated;  
 Power cable Ho7RN-F 2x1.0 mm² ( RGB 4x1.0 mm² / RGBW 5x0.75 mm² ), L = 3.0 m;  
 Mounting sleeve ABS;  
 Options: PWM / 1-10 V / Dali;  
 2000 k / 3000 k / 6000 k / RGB / RGBW;  
 beam angle;

**UWR 250 水下灯**  
 高品质水下照明灯具，适用于游泳池、水景，喷泉等水体照明；  
 产品适用不大于 1 米水深、-20°C~40°C 的水温环境；  
 产品具有 75°C 过温保护功能；

316 L 不锈钢灯体，表面镀铬处理；  
 10 mm 厚钢化玻璃灯罩；  
 硅胶密封圈；  
 IP 68 PG-11 电缆锁头，  
 预留 2x1.0 mm² (RGB 4x1.0 mm² / RGBW 5x0.75 mm²) 电缆，长度 3 米；  
 ABS预埋件；  
 可选项包括: PWM / 1-10 V / Dali;  
 2000 k / 3000 k / 6000 k / RGB / RGBW;  
 光束角；

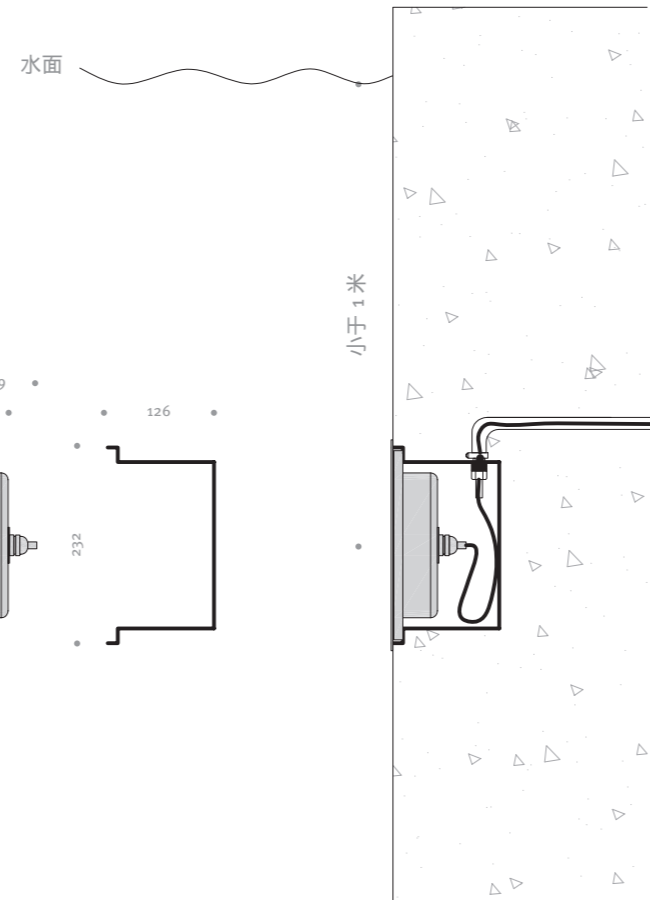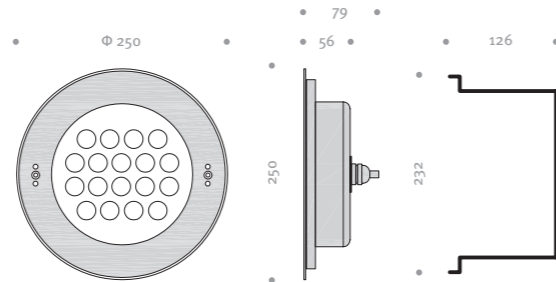

## UWR 250 Guide UWR 250 订货指南

Article No. 产品编号	Product Name 产品名称	Description 描述	Optics 光学系统	LED Lamps LED 光源
				45.6 W 52 W
9 811 04 01	UWR 250	DC 12 V / 24 V 18x2 W 单色 leds 20° 光束角 IP 68 IK 10	LS-20	-
9 811 04 02		DC 12 V / 24 V 18x2 W 单色 leds 25° 光束角 IP 68 IK 10	LS-25	-
9 811 04 03		DC 12 V / 24 V 18x2 W 单色 leds 30° 光束角 IP 68 IK 10	LS-30	-
9 811 04 04		DC 12 V / 24 V 18x2 W 单色 leds 35° 光束角 IP 68 IK 10	LS-35	-
9 811 04 05		DC 12 V / 24 V 18x2 W 单色 leds 45° 光束角 IP 68 IK 10	LS-45	-
9 812 04 01		DC 12 V / 24 V 18x2 W RGB 三合一 leds 30° 光束角 IP 68 IK 10	LS-30	-
9 813 04 01		DC 12 V / 24 V 18x3 W RGBW 四合一 leds 30° 光束角 IP 68 IK 10	LS-30	-
9 811 04 11		DC 12 V / 24 V 18x2 W leds 35 / 45° 光束角 IP 68 IK 10	LA-35 / 45	-
1 811 04 01	Installation sleeve	ABS预埋件，尺寸 Φ 232 mm × 126 mm		

Order No.: Article No. + Lamp (Colour Temperature), Driver and controllers need to be purchased separately  
 订货方式: 产品编号+光源(色温), 驱动电源、控制器等需要另外选购





# UWR 182 水下射灯



24V DC	IP 68	Class III	Ra>80	CE	RoHS	Ik 09
PWM	1-10 V	Dali	2000 K	3000 K	6000 K	RGB




**UWR 182**  
 High quality underwater luminaire, it is suitable for, water attractions, fountains etc;  
 Temperature of water between -20°C~40°C less than 1 meter depth;  
 Built-in overheat sensor system, Automatic Shutdown at 75°C;

Housing is made of molding shaped hard chromeplated stainless steel SUS 316 L# ;  
 10 mm step tempered glass enclosure;  
 Silicone gasket;  
 IP 68 PG-11 copper with nickel-coated;  
 Power cable Ho7RN-F 2x1.0 mm<sup>2</sup> ( RGB 4x1.0 mm<sup>2</sup> / RGBW 5x0.75 mm<sup>2</sup> ), L = 3.0 m;  
 Options: PWM / 1-10 V / Dali;  
 2000 k / 3000 k / 6000 k / RGB / RGBW;  
 Beam angle;

**UWR 182 水下射灯**  
 高品质水下照明灯具，适用于水景，喷泉等水体照明；  
 产品适用不大于1米水深、-20°C~40°C的水温环境；  
 产品具有75°C过温保护功能；

316 L 不锈钢灯体，表面镀铬处理；  
 10 mm 厚钢化玻璃灯罩；  
 硅胶密封圈；  
 IP 68 PG-11 电缆锁头，预留 2x1.0 mm<sup>2</sup> ( RGB 4x1.0 mm<sup>2</sup> / RGBW 5x0.75 mm<sup>2</sup> ) 电缆，长度3米；  
 可选项包括: PWM / 1-10 V / Dali ；  
 2000 k / 3000 k / 6000 k / RGB / RGBW ；  
 光束角；

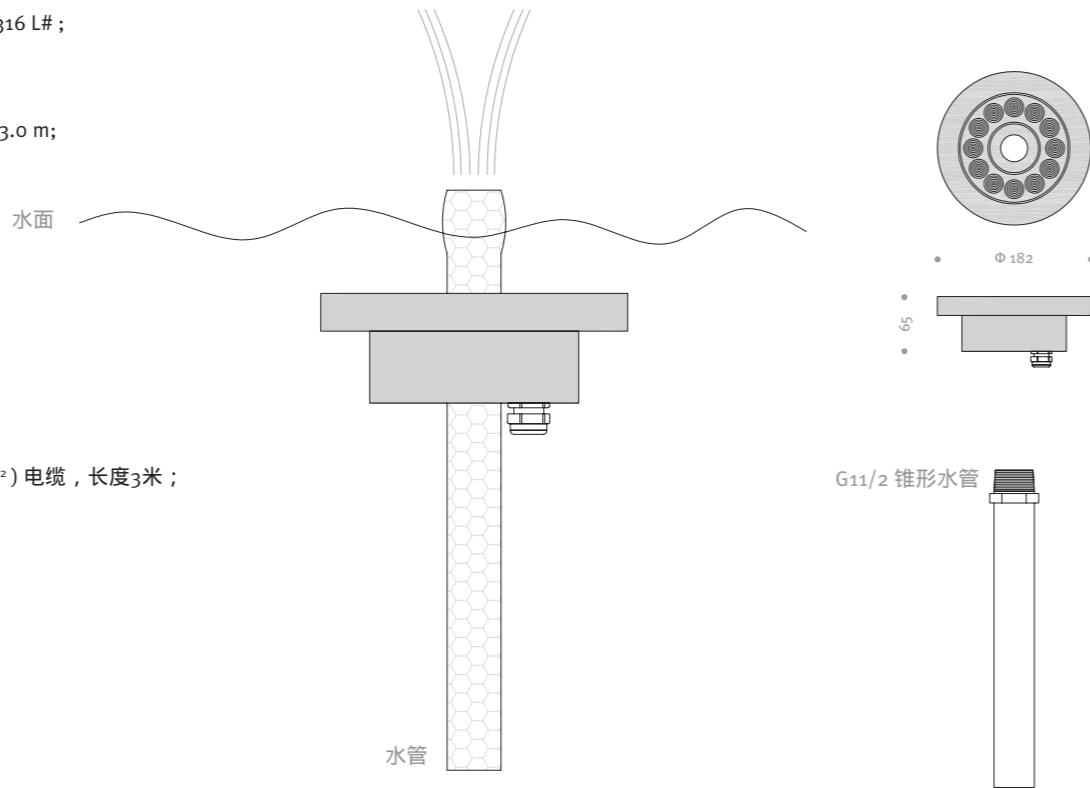

## UWR 182 Guide UWR 182 订货指南

Article No. 产品编号	Product Name 产品名称	Description 描述	Optics 光学系统	LED Lamps LED 光源		
				28.8 W	33.6 W	34.2 W
9 881 04 01	UWR 182	DC 12 V / 24 V 12x2 W 单色 leds 20° 光束角 IP 68 IK 09	LS-20	-	-	-
9 881 04 02		DC 12 V / 24 V 12x2 W 单色 leds 25° 光束角 IP 68 IK 09	LS-25	-	-	-
9 881 04 03		DC 12 V / 24 V 12x2 W 单色 leds 30° 光束角 IP 68 IK 09	LS-30	-	-	-
9 881 04 04		DC 12 V / 24 V 12x2 W 单色 leds 35° 光束角 IP 68 IK 09	LS-35	-	-	-
9 881 04 05		DC 12 V / 24 V 12x2 W 单色 leds 45° 光束角 IP 68 IK 09	LS-45	-	-	-
9 882 04 01		DC 12 V / 24 V 12x2 W RGB 三合一 leds 20° 光束角 IP 68 IK 09	LS-20	-	-	-
9 882 04 02		DC 12 V / 24 V 12x2 W RGB 三合一 leds 30° 光束角 IP 68 IK 09	LS-30	-	-	-
9 883 04 01		DC 12 V / 24 V 12x3 W RGBW 四合一 leds 20° 光束角 IP 68 IK 09	LS-20	-	-	-
9 883 04 02		DC 12 V / 24 V 12x3 W RGBW 四合一 leds 30° 光束角 IP 68 IK 09	LS-30	-	-	-
9 881 04 11		DC 12 V / 24 V 12x2 W 单色 leds 35 / 45° 光束角 IP 68 IK 09	LA-35 / 45	-	-	-



图片来源于网络

**DMK Technology (Shanghai) Co., Ltd.**

Add: Suite A2, 7rd Fl, No.257, Siping Rd, PRC-200081 Shanghai, China

Tel: +86-(0)21-62175782

Fax: +86-(0)21-62175782

Email: info@dmklighting.com


[www.dmklighting.com](http://www.dmklighting.com)



[www.dmklighting.com](http://www.dmklighting.com)



WeChat

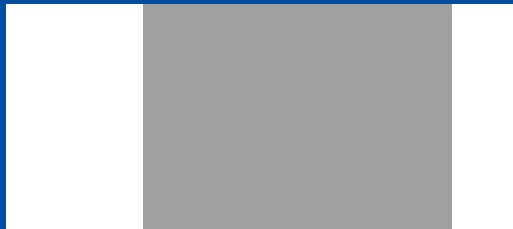

DMK\_Underwater Lighting\_2020\_V1.06

DMK RESERVES THE RIGHT TO INTRODUCE ANY CHANGES TO ITS OWN MODELS, WITHOUT PRIOR NOTICE.