
**OLSO****Installation and Operating Instructions****安 装 使 用 说 明**

Version 2022.1



In-ground luminaires / 地埋灯


## 9 17x 05 xx Olso R/Q



### Important Information / 重要信息

- The installation and maintenance of the product can only use the original parts, and the installation and operation of the equipment shall be subject to national and international regulations.  
本产品安装和维护工作只能使用原厂配件，设备的安装和操作适用于国家和国际法规。
- DMK is not liable for any damages resulting from improper or unskilled conduct.  
DMK 不承担任何因不当或不熟练行为而造成的损害赔偿任。
- Only qualified installation personnel are allowed to assemble and install products obtained from the DMK.  
只允许有安装资质的人员组装和安装从 DMK 获得的产品。
- The contents of this manual are subject to change without prior notice. Please refer to the material in kind.  
本说明书的内容如有变更，恕不另行通知。请以实物为准。
- If in doubt, please contact the supplier.  
如有疑问，请与供应商联系。

### Toolings / 工具



十字螺丝刀




吸盘

### Recommended Installation Procedure / 推荐安装过程

- Install the embedded part into the ground and get the power supply cable into it.  
预埋件安装入地面，将供电电缆接入预埋件内。



The embedded part should parallel to the ground.  
预埋件安装与地面水平。  
The thickness of the seepage layer under the embedded part should not be less than 25cm.  
预埋件下方渗水层厚度不小于 25cm。

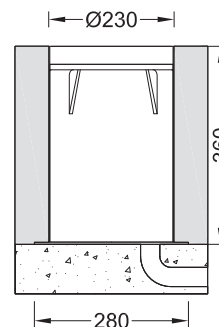

**Recommended Installation Procedure / 推荐安装过程**


2. Connect the 220V power supply line.  
将灯具电源线连接。



Reserve enough cable for maintenance easily.  
预留足够电缆长度，方便维护灯具。

Be sure to lock the cable gland to IP67 grade.  
务必将电缆锁头锁紧，达到 IP67 密封等级。

This step should be operated by professional personnel to avoid electric shock.  
此步骤需由专业人员操作，以免发生触电危险。

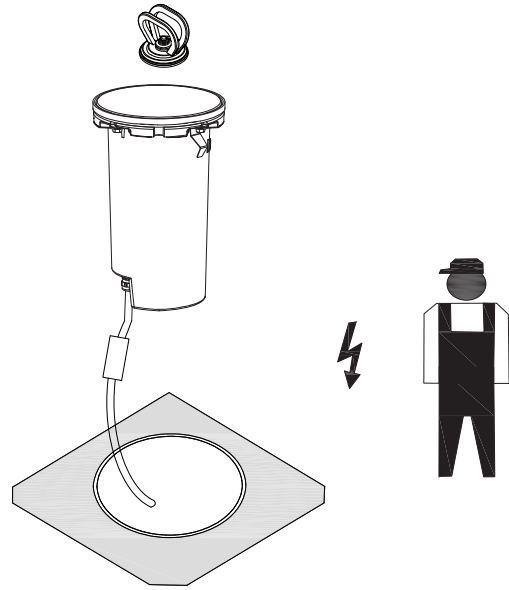

3. Put the fixture into the embedded part with the suction cup (the Spring buckle is aligned with the embedded part gap and rotates after turning).  
灯具用吸盘装入预埋件内，（灯具弹簧卡扣对准预埋件缺口，转入后旋转）。

