

# UWR 180 水下灯



|        |        |           |        |        |        |       |
|--------|--------|-----------|--------|--------|--------|-------|
| 24V DC | IP 68  | Class III | Ra>80  | CE     | RoHS   | Ik 08 |
| PWM    | 1-10 V | Dali      | 2000 K | 3000 K | 6000 K | RGB   |





**UWR 180**  
 High quality underwater luminaire, it is suitable for swimming pools, water attractions, fountains etc;  
 Temperature of water between -20°C~40°C less than 1 meter depth;  
 Built-in overheat sensor system, Automatic Shutdown at 75°C;

Housing is made of molding shaped hard chromeplated stainless steel SUS 316 L# ;  
 8 mm step tempered glass enclosure;  
 Silicone gasket;  
 IP 68 PG-11 copper with nickel-coated;  
 Power cable Ho7RN-F 2x1.0 mm<sup>2</sup> ( RGB 4x1.0 mm<sup>2</sup> / RGBW 5x0.75 mm<sup>2</sup> ), L = 3.0 m;  
 Mounting sleeve ABS;  
 Options: PWM / 1-10 V / Dali;  
 2000 k / 3000 k / 6000 k / RGB / RGBW;  
 beam angle;

**UWR 180 水下灯**  
 高品质水下照明灯具，适用于游泳池、水景，喷泉等水体照明；  
 产品适用不大于1米水深、-20°C~40°C的水温环境；  
 产品具有 75°C 过温保护功能；

316 L 不锈钢灯体，表面镀铬处理；  
 8 mm 厚钢化玻璃灯罩；  
 硅胶密封圈；  
 IP 68 PG-11 电缆锁头，预留 2x1.0 mm<sup>2</sup> ( RGB 4x1.0 mm<sup>2</sup> / RGBW 5x0.75 mm<sup>2</sup> ) 电缆，长度3米；  
 ABS 预埋件；  
 可选项包括: PWM / 1-10 V / Dali ;  
 2000 k / 3000 k / 6000 k / RGB / RGBW ;  
 光束角；

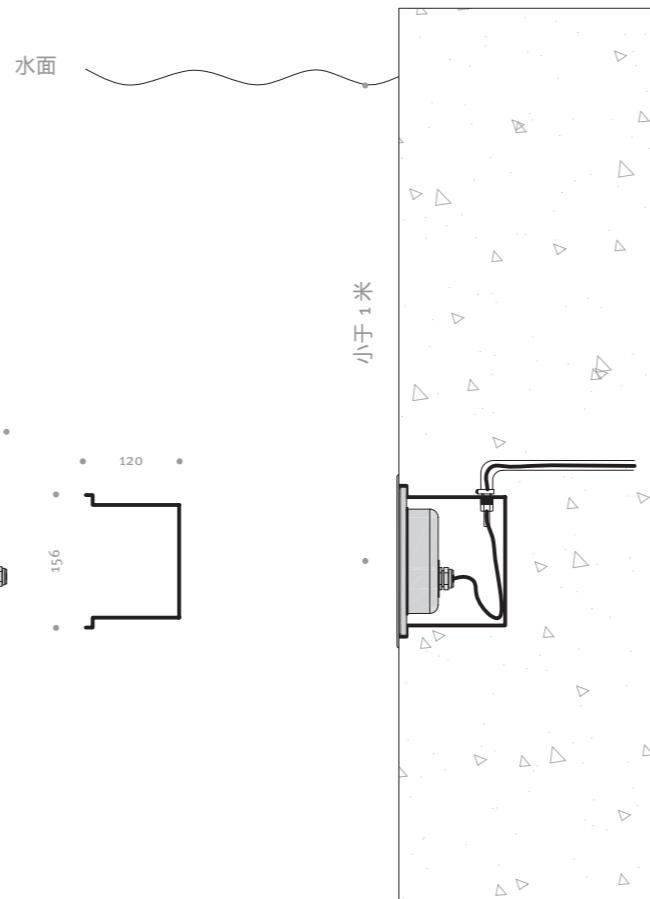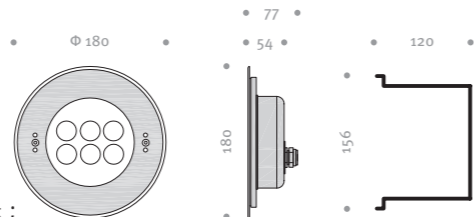

## UWR 180 Guide UWR 180 订货指南

| Article No.<br>产品编号 | Product Name<br>产品名称 | Description<br>描述                                      | Optics<br>光学系统 | LED Lamps<br>LED 光源 |
|---------------------|----------------------|--|----------------|---------------------|
|                     |                      |  |                | 8.9 W 15 W          |
| 9 831 04 01         | UWR 180              | DC 12 V / 24 V 6x2 W 单色 leds 20° 光束角 IP 68 IK 08       | LS-20          | -                   |
| 9 831 04 02         |                      | DC 12 V / 24 V 6x2 W 单色 leds 25° 光束角 IP 68 IK 08       | LS-25          | -                   |
| 9 831 04 03         |                      | DC 12 V / 24 V 6x2 W 单色 leds 30° 光束角 IP 68 IK 08       | LS-30          | -                   |
| 9 831 04 04         |                      | DC 12 V / 24 V 6x2 W 单色 leds 35° 光束角 IP 68 IK 08       | LS-35          | -                   |
| 9 831 04 05         |                      | DC 12 V / 24 V 6x2 W 单色 leds 45° 光束角 IP 68 IK 08       | LS-45          | -                   |
| 9 832 04 01         |                      | DC 12 V / 24 V 6x3 W RGB 三合一 leds 30° 光束角 IP 68 IK 08  | LS-30          | -                   |
| 9 833 04 01         |                      | DC 12 V / 24 V 6x3 W RGBW 四合一 leds 30° 光束角 IP 68 IK 08 | LS-30          | -                   |
| 9 831 04 11         |                      | DC 12 V / 24 V 6x2 W 单色 leds 35 / 45° 光束角 IP 68 IK 08  | LA-35 / 45     | -                   |
| 1 831 04 01         | Installation sleeve  | ABS预埋件，尺寸 Φ 156 mm × 120 mm                            |                |                     |

Order No.: Article No. + Lamp (Colour Temperature), Driver and controllers need to be purchased separately  
 订货方式: 产品编号+光源(色温), 驱动电源、控制器等需要另外选购

