



UWR 45 水下灯

24V DC

IP 68

Class III

Ra>80

CE

RoHS

Ik 03

- UWR 45**
- High quality underwater luminaire, it is suitable for swimming pools, water attractions, fountains etc;
 - Temperature of water between -20°C~40°C less than 1 meter depth;

- Housing is made of molding shaped hard chromeplated stainless steel SUS 316 L# ;
- 7 mm step tempered glass enclosure;
- Silicone gasket;
- IP 68 PG-11 copper with nickel-coated;
- Power cable Ho7RN-F 2×1.0 mm² L = 3.0 m;
- Mounting sleeve ABS;
- Options: PWM / 1-10 V / Dali;
- 2000 k / 3000 k / 6000 k;
- beam angle;

- UWR 45 水下灯**
- 高品质水下照明灯具，适用于游泳池、水景，喷泉等水体照明；
 - 产品适用不大于 1 米水深、-20°C~40°C 的水温环境；

- 316 L 不锈钢灯体，表面镀铬处理；
- 7 mm 厚钢化玻璃灯罩；
- 三元乙丙橡胶密封圈；
- IP 68 PG-11 电缆锁头，预留 2×1.0 mm² 电缆，长度 3 米；
- ABS预埋件；
- 可选项包括: PWM / 1-10 V / Dali ;
- 2000 k / 3000 k / 6000 k ;
- 光束角。

PWM

1-10 V

Dali

2000 K

3000 K


6000 K

10°

15°

20°

30°

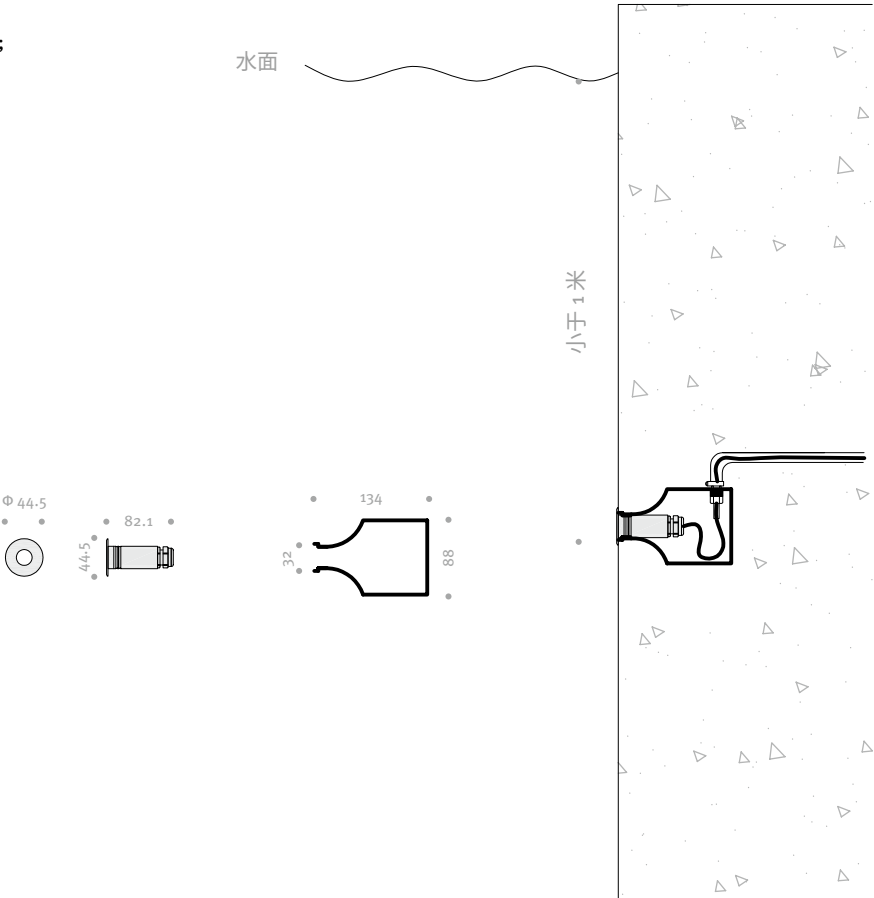

UWR 45 Guide UWR 45 订货指南

Article No. 产品编号	Product Name 产品名称	Description 描述	Optics 光学系统	LED Lamps LED 光源
				2 W
9 871 04 01	UWR 45	DC12 V / 24 V 1×2 W 单色 leds, 10° 光束角 IP 68 IK 03	LS-10	●
9 871 04 02		DC12 V / 24 V 1×2 W 单色 leds, 15° 光束角 IP 68 IK 03	LS-15	●
9 871 04 03		DC12 V / 24 V 1×2 W 单色 leds, 20° 光束角 IP 68 IK 03	LS-20	●
9 871 04 04		DC12 V / 24 V 1×2 W 单色 leds, 30° 光束角 IP 68 IK 03	LS-30	●
1 871 04 01	Installation sleeve	ABS预埋件，尺寸 Φ 32mm × 134mm		

Order No.: Article No. + Lamp (Colour Temperature) , Driver and controllers need to be purchased separately
订货方式: 产品编号+光源（色温），驱动电源、控制器等需要另外选购

