

UWR 180 水下灯



24V DC

IP 68

Class III

Ra>80

CE

RoHS

Ik 08

- UWR 180**
- High quality underwater luminaire, it is suitable for swimming pools, water attractions, fountains etc;
 - Temperature of water between -20°C~40°C less than 1 meter depth;
 - Built-in overheat sensor system, Automatic Shutdown at 75°C;

- Housing is made of molding shaped hard chromeplated stainless steel SUS 316 L# ;
- 8 mm step tempered glass enclosure;
- Silicone gasket;
- IP 68 PG-11 copper with nickel-coated;
- Power cable Ho7RN-F 2×1.0 mm² (RGB 4×1.0 mm² / RGBW 5×0.75 mm²), L = 3.0 m;
- Mounting sleeve ABS;
- Options: PWM / 1-10 V / Dali;
- 2000 k / 3000 k / 6000 k / RGB / RGBW;
- beam angle;

- UWR 180 水下灯**
- 高品质水下照明灯具，适用于游泳池、水景，喷泉等水体照明；
 - 产品适用不大于1米水深、-20°C~40°C 的水温环境；
 - 产品具有 75°C 过温保护功能；

- 316 L 不锈钢灯体，表面镀铬处理；
- 8 mm 厚钢化玻璃灯罩；
- 硅胶密封圈；
- IP 68 PG-11 电缆锁头，预留 2×1.0 mm² (RGB 4×1.0 mm² / RGBW 5×0.75 mm²)电缆，长度3米；
- ABS 预埋件；
- 可选项包括: PWM / 1-10 V / Dali ;
- 2000 k / 3000 k / 6000 k / RGB / RGBW ；
- 光束角；

PWM

1-10 V

Dali

2000 K

3000 K

6000 K

RGB

RGBW

20°



25°

30°

35°

45°

35/45°

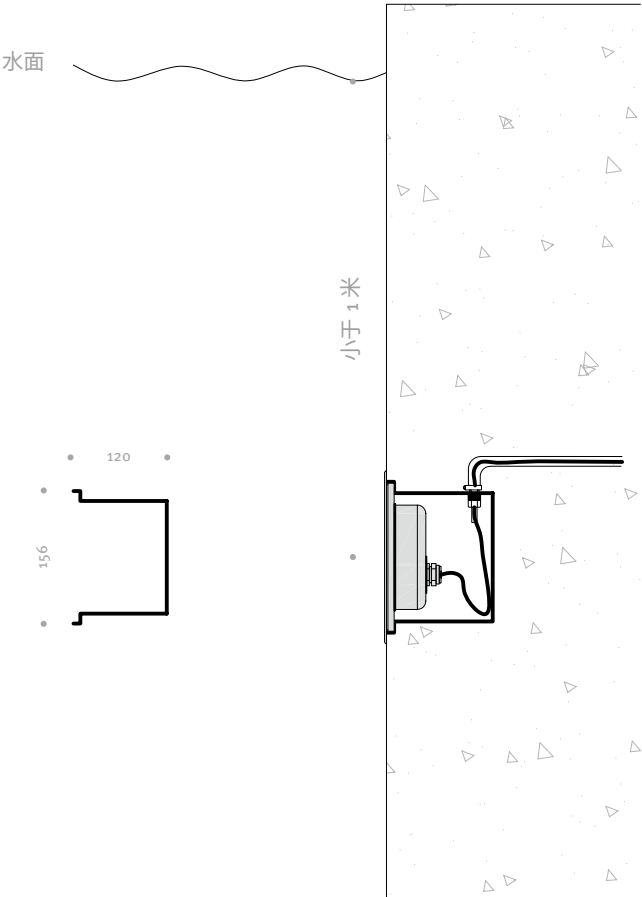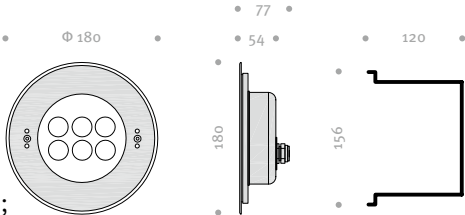

UWR 180 Guide
UWR 180 订货指南

Article No. 产品编号	Product Name 产品名称	Description 描述	Optics 光学系统	LED Lamps LED 光源	
				8.9 W	15 W
9 831 04 01	UWR 180	DC 12 V / 24 V 6×2 W 单色 leds 20° 光束角 IP 68 IK 08	LS-20	●	—
9 831 04 02		DC 12 V / 24 V 6×2 W 单色 leds 25° 光束角 IP 68 IK 08	LS-25	●	—
9 831 04 03		DC 12 V / 24 V 6×2 W 单色 leds 30° 光束角 IP 68 IK 08	LS-30	●	—
9 831 04 04		DC 12 V / 24 V 6×2 W 单色 leds 35° 光束角 IP 68 IK 08	LS-35	●	—
9 831 04 05		DC 12 V / 24 V 6×2 W 单色 leds 45° 光束角 IP 68 IK 08	LS-45	●	—
9 832 04 01		DC 12 V / 24 V 6×3 W RGB 三合一 leds 30° 光束角 IP 68 IK 08	LS-30	—	●
9 833 04 01		DC 12 V / 24 V 6×3 W RGBW 四合一 leds 30° 光束角 IP 68 IK 08	LS-30	—	●
9 831 04 11		DC 12 V / 24 V 6×2 W 单色 leds 35 / 45° 光束角 IP 68 IK 08	LA-35 / 45	●	—
1 831 04 01	Installation sleeve	ABS预埋件，尺寸 $\Phi 156$ mm × 120 mm			

Order No.: Article No. + Lamp (Colour Temperature) , Driver and controllers need to be purchased separately
订货方式: 产品编号+光源（色温），驱动电源、控制器等需要另外选购

